



UFO Area Light
DUO Selectable
(150W)



UFO Area Light
DUO Selectable
(320W)



UFO Area Light
(150W)



UFO Area Light
(280W)



0-10V Dimming



4 Wattage Selectable



High quality aluminium shell



Introduce:

Our LED area light is super bright & 80% energy saving. The shatter-resistant design for both commercial and industrial grade applications such as Parking Lot, Street, Mining, Park, Pooling Lighting, Sport Lighting, Sport Yard, Square, Square Lighting, Tunnel Lighting and industrial buildings, or anywhere perimeter lighting is desirable.

The street light fixtures, LED varieties, are perfect for your area lighting needs. These light pole kits come with everything you need to get your project finished.


Features & Benefits:

- 0-10V seamless dimming capabilities
- 4 Wattage selectable
- Multiple optic lens
- Multiple mounting bracket available
- This light fixture designed with curved line for more harmonious and beautiful look with heavy duty and durable die-cast aluminum material.


Application place:

The product is suitable for Parking Area, Driveway, Business parkway, Walkway and so on.


Available Size:

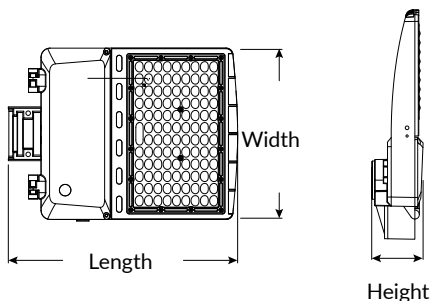


UFO Area Light
DUO Selectable (150W)

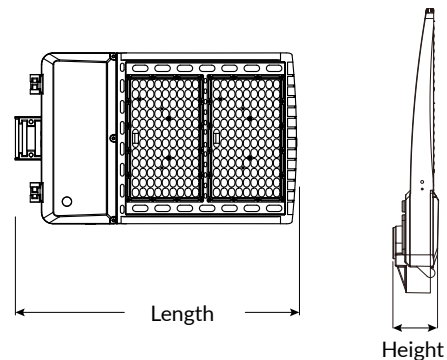

UFO Area Light
DUO Selectable (320W)

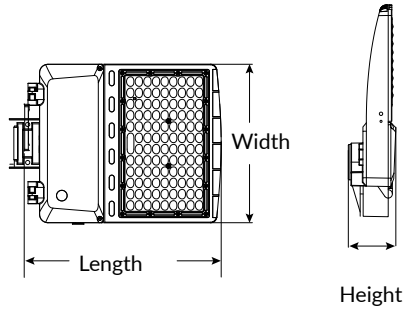

UFO Area Light (150W)

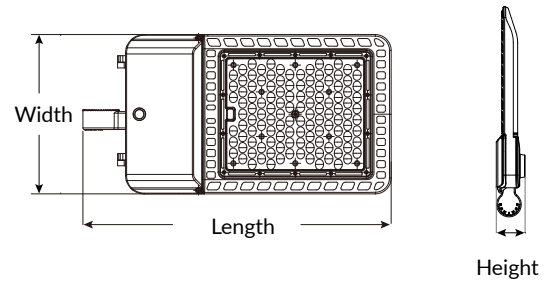

UFO Area Light (280W)

Technical Date:

| Picture | | | | |
|------------------------|---|---|---------------------------------|---------------------------------|
| Type | UFO Area Light DUO Selectable (150W) | UFO Area Light DUO Selectable (320W) | UFO Area Light (150W) | UFO Area Light (280W) |
| Rated Voltage | 120-277V | 120-277V | 120-277V | 120-277V |
| Rated Power | 75/100/120/150W | 160/200/240/320W | 75/100/120/150W | 160/200/240/280W |
| Power Factor | 0.7 | 0.7 | 0.7 | 0.7 |
| Declared Luminous Flux | 9750/13000/ 15600/19500lm | 20800/26000/ 31200/41600lm | 9750/13000/ 15600/19500lm | 20800/26000/ 31200/36960lm |
| Color Temperature | 2CCT(4000K /5000K) | 2CCT(4000K /5000K) | 5000K | 5000K |
| Average Ra | 70 | 70 | 70 | 70 |
| Beam Angle | Type III | Type III | Type III | Type III |
| Average Life | 50000H | 50000H | 50000H | 50000H |
| Working Temperature | -20°C (-4°F) ~ 40°C (+104°F) | -20°C (-4°F) ~ 40°C (+104°F) | -20°C (-4°F) ~ 40°C (+104°F) | -20°C (-4°F) ~ 40°C (+104°F) |
| Material | Aluminum + PC | Aluminum + PC | Aluminum + PC | Aluminum + PC |
| Dimmable | 0-10V | 0-10V | 0-10V | 0-10V |
| Length | 16.00Inch(406.4mm) | 24.33Inch(618.00mm) | 18.50Inch(470.8mm) | 22.80Inch(580.3mm) |
| Width | 11.97Inch(304.0mm) | 14.76Inch(375.00mm) | 9.84Inch(250.00mm) | 11.80Inch(300.0mm) |
| Height | 3.58Inch(91.00mm) | 3.82Inch(97.00mm) | 2.76Inch(70.00mm) | 3.13Inch(79.50mm) |
| Environment | Wet Location | Wet Location | Wet Location | Wet Location |
| Certificate | ETL, FCC, DLC5.1P | ETL, FCC, DLC5.1P | ETL, FCC, DLC5.1P | ETL, FCC, DLC5.1P |