



Akson Down light



110°

CE CB

Introduce:

Akson Down light ocuses on high quality LED Light-ing.Low-profile modern style, this modern ceiling light looks elegant, clean and minimalistic and is therefore

ideal for modern furnishing styles. The lights are perfect for any area with low ceiling. The flat back of the flush light fixture blends in with the ceiling, freeing up space while matching any decorating style. Ideal for bedroom, kitchen, dining room, closet, bathroom, living room, laundry room, etc. Lights has the features of simple and beautiful appearance, compact structure, lightweight and easy to use, soft light, safe use and high efficiency; It is a kind of LED luminaire suitable for indoor lighting which is directly mounted on the ordinary mounting surface.


Features & Benefits:

- DOB/Back-lit design for even lighting distribution
- High cost performance, ultra-thin design
- No Flicker and Buzzing, comfortable for your eyes, provides a comfortable, stress-free atmosphere
- CRI80 High ability of revealing the colors of various objects faithfully and protect your eyes, allowing you to enjoy the most realistic objects' color

Application place:

Residential home/Living room/Bedroom/Apartments/Hotel/Restaurant

Available Sizes:

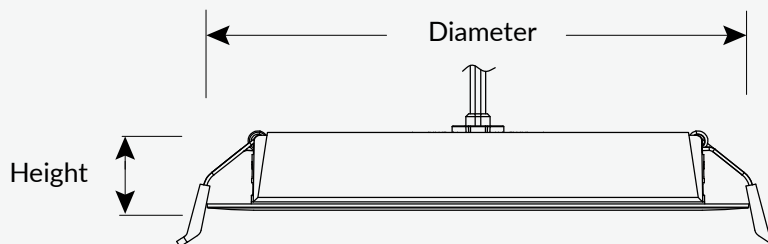

| Type | Diameter | Height |
|-------------|--------------------|-------------------|
| Akson 3Inch | 3.79 Inch(96.2mm) | 1.20 Inch(30.4mm) |
| Akson 4Inch | 4.54 Inch(115.2mm) | 1.20 Inch(30.4mm) |
| Akson 5Inch | 5.60 Inch(142.2mm) | 1.20 Inch(30.4mm) |
| Akson 6Inch | 6.70 Inch(170.2mm) | 1.20 Inch(30.4mm) |
| Akson 7Inch | 7.69 Inch(195.2mm) | 1.20 Inch(30.4mm) |
| Akson 8Inch | 8.79 Inch(223.2mm) | 1.20 Inch(30.4mm) |

Technical Data:

| Lamp Type | Akson 3Inch | Akson 4Inch | Akson 5Inch | Akson 6Inch | Akson 7Inch | Akson 8Inch |
|------------------------|-------------------------|-------------|-------------|-------------|-------------|-------------|
| Rated Voltage | 220-240V | | | | | |
| Rated Power | 5W | 7W | 9W | 13W | 16W | 22W |
| Power Factor | / | DF0.7 | | | | |
| Declared Luminous Flux | 450lm | 650lm | 900lm | 1300lm | 1600lm | 2200lm |
| Color Temperature | 3000K/6500K | | | | | |
| Average Ra | Ra80 | | | | | |
| Beam Angle | 110° | | | | | |
| Average Life | 25000H | | | | | |
| Working Temperature | -10°(14°F)~40°C(+104°F) | | | | | |
| Material | Plastic | | | | | |
| Dimmable | NO | | | | | |
| Cut-out | 75mm | 95mm | 120mm | 150mm | 170mm | 200mm |
| Environment | IP20 | | | | | |
| Certificate | CE/CB/ERP | | | | | |