

TOPSTAR

— Since 1958 —

Eco Bulkhead D220



IP65



IK08

CE CB

Introduce:

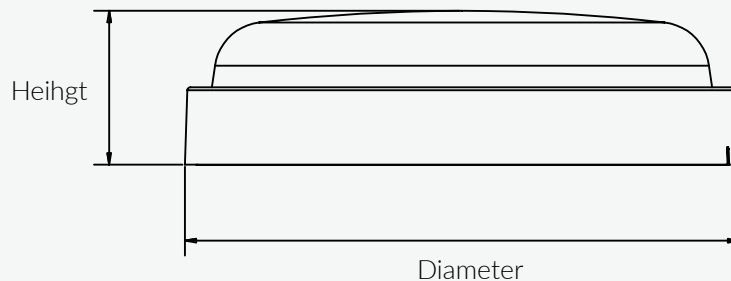
Eco Bulkhead D220 has the features of simple and beautiful appearance, compact structure, lightweight and easy to use, soft light, safe use and high efficiency. Special material selection and structural design enable products to meet IP65 and IK08. Suitable for humid environment, and the selection of high-quality anti-ultraviolet PC material, so that the product is not afraid of sunlight. Easy Installation by mounting brackets. Eco Bulkhead D220 is perfect for interior and exterior applications including residential and commercial entrance ways and corridors. It benefits from a robust design that meets IK10 requirements

Feature & Benefits:

1. Easy installation by mounting brackets
2. High quality robust PC UV Resistant materials
3. No Flicker and Buzzing, comfortable for your eyes, provides a comfortable/stress-free atmosphere
4. High efficiency, up to 110lm/W
5. PST<1, SVM<0.4
6. Excellent water protection, IP65
7. Vandal resistant luminaires, IK08

Application place:

Car parks/Corridors/Stairwells/Warehouses

Available Sizes:

Type	Heihgt	Diameter
Eco Bulkhead D220	2.4Inch(61mm)	8.66Inch(220mm)

Technical Data:

Lamp Type	Eco Bulkhead D220	
Input Voltage	100-240V	
Rated Power	15W	22W
Displacement Factor--DF	DF0.7	
Declared Luminous Flux	1650lm	2420lm
Luminaire efficacy	110lm/W	
Color Temperature	3000K/6500K	
Average Ra	80	
Beam Angle	120°	
Average Life	25000H	
Working Temperature	-10 C (14 F)~40 C (+104 F)	
Material	Resistant UV PC Plastic	
Dimmable	NO	
Environment	IP65	
Certificate	CE/CB/ERP	