



CE CB

### **Introduce:**

Athena Slim Down light G2 focuses on high quality LED Lighting. Low-profile modern style, this modern ceiling light looks elegant, clean and minimalistic and is therefore ideal for modern furnishing styles. The lights are perfect for any area with low ceiling. The flat back of the flush light fixture blends in with the ceiling, freeing up space while matching any decorating style. Ideal for bedroom, kitchen,



Athena Slim Down light G2

dining room, closet, bathroom, living room, laundry room, etc. Lights has the features of simple and beautiful appearance, compact structure, lightweight and easy to use, soft light, safe use and high efficiency; It is a kind of LED luminaire suitable for indoor lighting which is directly mounted on the ordinary mounting surface.


## Features & Benefits :

- Edge-lit design for even lighting distribution, Up to 16.5mm total high
- High quality light guide plate reduces light loss and uniform light output
- No Flicker and Buzzing, comfortable for your eyes, provides a comfortable, stress-free atmosphere
- External isolation drive, Less heat output and extremely long lifespan 25000hrs.
- CRI80 High ability of revealing the colors of various objects faithfully and protect your eyes, allowing you to enjoy the most realistic objects' color.

## Application place :

Residential home/Living room/Bedroom/Apartments/Hotel/Restaurant

## Available Sizes :

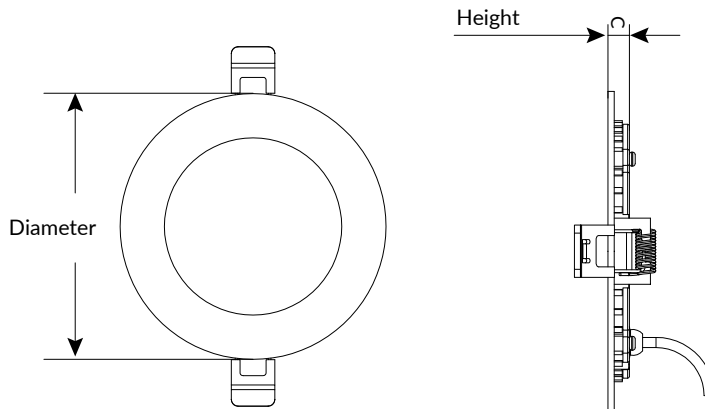

Model	Height	Diameter
Athena G2 4Inch	16.5mm	120mm
Athena G2 6Inch	16.5mm	168mm
Athena G2 8Inch	16.5mm	223mm

**Technical Data:**

Picture			
Type	Athena G2 4Inch	Athena G2 6Inch	Athena G2 8Inch
Rated Voltage	220-240V	220-240V	220-240V
Rated Power	6.5W	12W	16W
Power Factor	0.7	0.7	0.7
Declared Luminous Flux	650lm	1200lm	1600lm
Color Temperature	3000K/6500K	3000K/6500K	3000K/6500K
Average Ra	Ra80	Ra80	Ra80
Beam Angle	110°	110°	110°
Average Life	25000H	25000H	25000H
Working Temperature	-10~40℃	-10~40℃	-10~40℃
Material	Metal、Plastic	Metal、Plastic	Metal、Plastic
Isolation drive	Yes	Yes	Yes
Dimmable	NO	NO	NO
Cut-out	100mm	150mm	200mm
Environment	IP20	IP20	IP20
Certificate	CE/CB/ERP	CE/CB/ERP	CE/CB/ERP