


Smart Disk Downlight





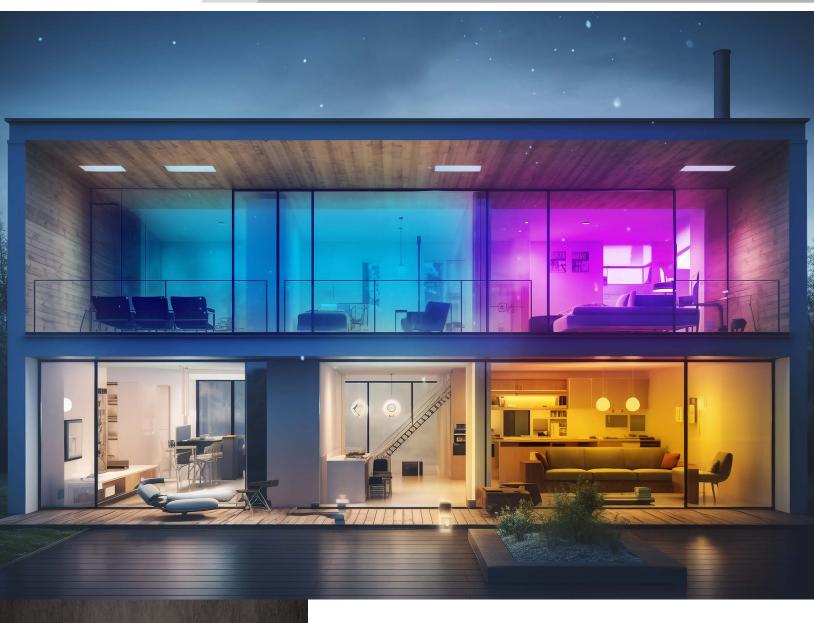

FULL COLOR

With 1600 colors, customize variable light modes.



FUNCTION SETTING

Easily arrange your plans and times.



INSTALLATION

Mount directly to a junction box, or retrofit into a wide range of existing cans











TOPSTAR — Since 1958 —

Smart Disk Downlight

Application:

Make your home into a smart home with the TOPSTAR smart disk downlight. Fitting most 4 and 5-6 inch recessed can housings or junction box. Use your favorite smart device to easily turn lights on/off, dim, set groups and schedules from anywhere. Choose energizing daylight or wind down with relaxing soft white light. Get creative with color, it's all up to you. Control lighting with simple voice commands or an intuitive mobile app. Setup is simple: the disk downlights come with quick-connect wiring and a medium base adapter. Install and connect directly to your 2.4GHz home Wi-Fi in minutes. Enhance high-CRI LED light makes colors vibrant and skin tones look more natural, all while saving energy and lasting for years. It has never been easier to customize your home's lighting to suit your lifestyle.

Feature & Benefits:

- 1. Function optional: DIM, TW, RGBCW.
- 2. Support Matter over Wi-Fi or Matter over Thread protocol.
- 3. With the ability to support a stunning array of 1600 colors and an adjustable color temperature ranging from 2700K to 6500K.
- 4. Enhance high-CRI LED light makes colors vibrant.
- 5. Turn on/off, adjust lighting, set groups and schedules with your smartphone.
- 6. Compatible with Google Home and Amazon Alexa voice assistants.
- 7. Converts conventional lighting to energy saving smart LED technology
- 8. Suitable for most 4 and 5-6 inch recessed can housings or junction box.

Application place:

The product is suitable for residential home, living room and so on.





Smart Disk Downlight

Technical Date:

Lamp Type 5&6Inch Disk Downlight Rated Voltage 120V Rated Power 15W Power Factor 0.7 Declared Luminous Flux 1100Im Color Temperature 2700~6500K & RGB Average Ra 90 Beam Angle 110° Average Life 25000H
Rated Voltage 120V Rated Power 15W Power Factor 0.7 Declared Luminous Flux 1100Im Color Temperature 2700~6500K & RGB Average Ra 90 Beam Angle 110° Average Life 25000H
Rated Power Power Factor 0.7 Declared Luminous Flux 1100Im Color Temperature 2700~6500K & RGB Average Ra 90 Beam Angle 110° Average Life 25000H
Power Factor 0.7 Declared Luminous Flux 1100lm Color Temperature 2700~6500K & RGB Average Ra 90 Beam Angle 110° Average Life 25000H
Declared Luminous Flux1100lmColor Temperature2700~6500K & RGBAverage Ra90Beam Angle110°Average Life25000H
Color Temperature2700~6500K & RGBAverage Ra90Beam Angle110°Average Life25000H
Average Ra 90 Beam Angle 110° Average Life 25000H
Beam Angle 110° Average Life 25000H
Average Life 25000H
Washing Tanan gratum
Working Temperature $-20^{\circ}\text{C}(-4^{\circ}\text{F})\sim40^{\circ}\text{C}(+104^{\circ}\text{F})$
Material Metal + Plastic
Dimmable App Control
Diameter 7.09Inch(180mm)
Height 1.40Inch(35.5mm)
Environment Damp Location
Certificate ETL、FCC、CEC-T20