

TOPSTAR

— Since 1958 —

5CCT A Bulbs



CE CB



5CCT

Introduce :


The color selection feature of these bulbs lets you choose from five different white color temperatures ranging from 2700K to 5000K. You can use the toggle on the bulb's body to choose the one you need from five color temperatures, so that you can better match the decoration. This covers a broad spectrum from Soft White to Daylight White light. This flexibility gives you the ability to change the mood and aesthetic of a space just by choosing the color of the light. Perfect for decorative and general lighting applications and creates a warm ambience similar to traditional lamps. Great replacement lamp for traditional incandescent lamp.

Features & Benefits :

- Choose from 5 Colors Soft White to Daylight White.
- A sleek, compact and highly energy efficient , produce natural and neat atmosphere.
- replace traditional incandescent, halogen and compact fluorescent lamps.
- Omni-directional light distribution design make it a bright, all-around lighting .
- No Flicker and Buzzing, comfortable for your eyes, provides a comfortable, stress-free atmosphere.
- CRI80, allowing you to enjoy the most realistic objects' color. provides a comfortable, stress-free atmosphere.

Application place :

Commercial Areas/Hospitality Installations/ Residential lighting/ Retail shops/ Social Areas.

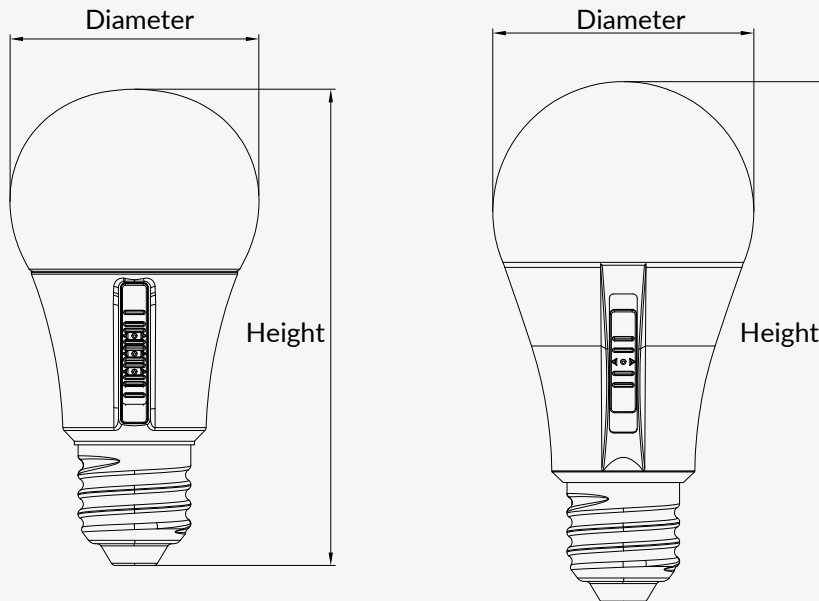

Type	Diameter	Height
5CCT A60(58)	58mm	110mm
5CCT A60	60mm	119mm

Technical Data :

Lamp Type	5CCT A60(58)	5CCT A60(58)	5CCT A60	5CCT A60
Rated Voltage	220-240V	220-240V	220-240V	220-240V
Rated Power	4.9W	9W	10W	14W
Incandescent Equivalent	40W	60W	75W	100W
Displacement Factor--DF	DF0.5	DF0.5	DF0.7	DF0.7
Declared Luminous Flux	470lm	806lm	1055lm	1521lm
Color Temperature	2700K&3000K& 3500K&4000K&5000K	2700K&3000K& 3500K&4000K&5000K	2700K&3000K& 3500K&4000K&5000K	2700K&3000K& 3500K&4000K&5000K
Average Ra	Ra80	Ra80	Ra80	Ra80
Beam Angle	220°	220°	220°	220°
Average Life	15000H	15000H	15000H	15000H
Working Temperature	-10~40°C	-10~40°C	-10~40°C	-10~40°C
Material	Plastics and Aluminum	Plastics and Aluminum	Plastics and Aluminum	Plastics and Aluminum
Dimmable	NO	NO	NO	NO
Base	E27	E27	E27	E27
Environment	IP20	IP20	IP20	IP20
Certificate	CE/CB/ERP	CE/CB/ERP	CE/CB/ERP	CE/CB/ERP