



Akson Down light



110°

CE CB

Introduce:

Akson Down light ocuses on high quality LED Light-ing.Low-profile modern style, this modern ceiling light looks elegant, clean and minimalistic and is therefore

ideal for modern furnishing styles. The lights are perfect for any area with low ceiling. The flat back of the flush light fixture blends in with the ceiling, freeing up space while matching any decorating style. Ideal for bedroom, kitchen, dining room, closet, bathroom, living room, laundry room, etc. Lights has the features of simple and beautiful appearance, compact structure, lightweight and easy to use, soft light, safe use and high efficiency; It is a kind of LED luminaire suitable for indoor lighting which is directly mounted on the ordinary mounting surface.


Features & Benefits:

- DOB/Back-lit design for even lighting distribution
- High cost performance, ultra-thin design
- No Flicker and Buzzing, comfortable for your eyes, provides a comfortable, stress-free atmosphere
- CRI80 High ability of revealing the colors of various objects faithfully and protect your eyes, allowing you to enjoy the most realistic objects' color

Application place:

Residential home/Living room/Bedroom/Apartments/Hotel/Restaurant

Available Sizes:

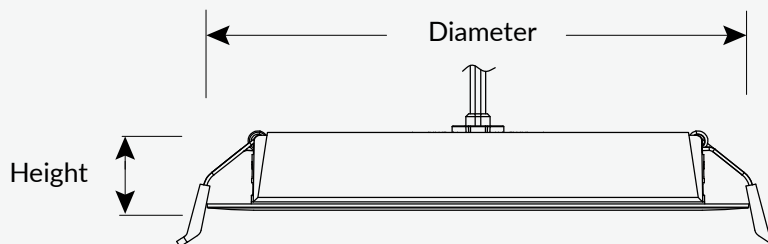

Type	Diameter	Height
Akson 3Inch	3.79 Inch(96.2mm)	1.20 Inch(30.4mm)
Akson 4Inch	4.54 Inch(115.2mm)	1.20 Inch(30.4mm)
Akson 5Inch	5.60 Inch(142.2mm)	1.20 Inch(30.4mm)
Akson 6Inch	6.70 Inch(170.2mm)	1.20 Inch(30.4mm)
Akson 7Inch	7.69 Inch(195.2mm)	1.20 Inch(30.4mm)
Akson 8Inch	8.79 Inch(223.2mm)	1.20 Inch(30.4mm)

Technical Data:

Lamp Type	Akson 3Inch	Akson 4Inch	Akson 5Inch	Akson 6Inch	Akson 7Inch	Akson 8Inch
Rated Voltage	220-240V					
Rated Power	5W	7W	9W	13W	16W	22W
Power Factor	/	DF0.7				
Declared Luminous Flux	450lm	650lm	900lm	1300lm	1600lm	2200lm
Color Temperature	3000K/6500K					
Average Ra	Ra80					
Beam Angle	110°					
Average Life	25000H					
Working Temperature	-10°(14°F)~40°C(+104°F)					
Material	Plastic					
Dimmable	NO					
Cut-out	75mm	95mm	120mm	150mm	170mm	200mm
Environment	IP20					
Certificate	CE/CB/ERP					