



Cinderella Down lightt
Recessed



Cinderella Down lightt
Surface



110°

CE CB

Introduce:

Cinderella Down light ocuses on high quality LED Lighting.Low-profile modern style. Three Cut-out sizes available,4inch,6inch,8inch. Two installation modes are

available, recessed or surface mounted. This modern ceiling light looks elegant, clean and minimalist and is therefore ideal for modern furnishing styles. The lights are perfect for any area with low ceiling. The flat back of the flush light fixture blends in with the ceiling, freeing up space while matching any decorating style. Ideal for bedroom, kitchen, dining room, closet, bathroom, living room, laundry room, etc. Lights has the features of simple and beautiful appearance, compact structure, lightweight and easy to use, soft light, safe use and high efficiency; It is a kind of LED luminaire suitable for indoor lighting which is directly mounted on the ordinary mounting surface.


Features & Benefits:

- Unique edge-lit design, elegant and clear
- Toggle control 3CCT, reduce SKUs and inventory
- High cost performance, ultra-thin design
- No Flicker and Buzzing, comfortable for your eyes, provides a comfortable, stress-free atmosphere
- CRI80 High ability of revealing the colors of various objects faithfully and protect your eyes, allowing you to enjoy the most realistic objects' color

Application place:

Residential home/Living room/Bedroom/Apartments/Hotel/Restaurant

Available Sizes:

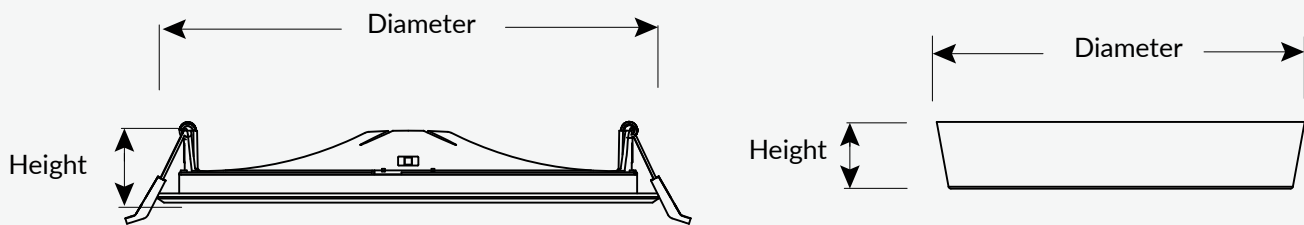

Type	Diameter	Height
Recessed 4Inch	4.72 Inch(120mm)	1.41 Inch(35.8mm)
Recessed 6Inch	6.34 Inch(161mm)	1.36 Inch(34.5mm)
Recessed 8Inch	8.35 Inch(212mm)	1.45 Inch(36.8mm)
Surface 4Inch	4.43 Inch(112.6mm)	1.21 Inch(30.8mm)
Surface 6Inch	6.30 Inch(160.1mm)	1.16 Inch(29.4mm)
Surface 8Inch	8.39 Inch(213mm)	1.20 Inch(30.4mm)

Technical Data:

Lamp Type	Recessed 4Inch	Recessed 6Inch	Recessed 8Inch		Surface 4Inch	Surface 6Inch	Surface 8Inch	
Rated Voltage	220-240V							
Rated Power	7W	12W	16W	18W	7W	12W	16W	18W
Power Factor	DF0.5	DF0.7			DF0.5	DF0.7		
Declared Luminous Flux	650lm	1200lm	1600lm	2000lm	650lm	1200lm	1600lm	2000lm
Color Temperature	3000K&4000K&5700K							
Average Ra	Ra80							
Beam Angle	110°							
Average Life	35000H							
Working Temperature	-10°(14°F)~40°C(+104°F)							
Material	Plastic							
Dimmable	NO							
Cut-out	100mm	150mm	200mm	/				
Environment	IP44 in front							
Certificate	CE/CB/ERP							