

Fizz Bulkhead D300



Fizz Bulkhead D250  
Fizz Bulkhead D300  
Fizz Bulkhead D330



IP65



IK10

CE CB

**Introduce:**

Fizz Bulkhead has the features of simple and beautiful appearance, compact structure, lightweight and easy to use, soft light, safe use and high efficiency. Special material selection and structural design enable products to meet IP65 and IK10. Suitable for humid environment, and the selection of high-quality anti-ultraviolet PC material, so that the product is not afraid of sunlight. Fizz Bulkhead is perfect for interior and exterior applications including residential and commercial entrance ways and corridors. It benefits from a robust design that meets IK10 requirements.


**Feature & Benefits:**

1. High efficiency, up to 120lm/W
2. Ultra-high lifespan, L70B50@Ta25, >60000Hrs
3. High quality robust PC UV Resistant materials
4. No Flicker and Buzzing, comfortable for your eyes, provides a comfortable/stress-free atmosphere
5. Pst≤1.0, SVM≤0.4
6. Excellent water protection , IP65
7. Vandal resistant luminaires, IK10
8. Function optional: Standard, Microwave, Emergency, Microwave & Emergency
9. D300 size, also have black decorative ring optional.

**Application place:**

Car parks/Corridors/Stairwells/Warehouses

**Available Sizes:**

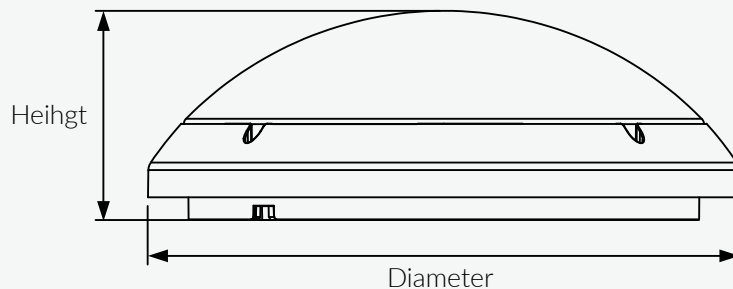

| Type               | Height         | Diameter        |
|--------------------|----------------|-----------------|
| Fizz Bulkhead D250 | 3.9Inch(100mm) | 9.8Inch(250mm)  |
| Fizz Bulkhead D300 | 4.2Inch(106mm) | 11.8Inch(300mm) |
| Fizz Bulkhead D330 | 4.2Inch(106mm) | 13.0Inch(330mm) |

**Technical Data:**

| Lamp Type                   | Standard Type D250                          | Standard Type D300 |        |        | Standard Type D330 |  |
|-----------------------------|---|--------------------|--------|--------|--------------------|--|
| Input Voltage               | 100-240V                                    |                    |        |        |                    |  |
| Rated Power                 | 17W   | 17W                | 25W    | 20W    | 27W                |  |
| Power Factor--PF            | PF0.95                                      |                    |        |        |                    |  |
| Displacement Factor--DF     | DF0.9                                       |                    |        |        |                    |  |
| Declared Luminous Flux      | 2040lm                                      | 2040lm             | 3000lm | 2400lm | 3240lm             |  |
| Luminaire efficacy          | 120lm/W                                     |                    |        |        |                    |  |
| Color Temperature           | 4000K/5000K                                 |                    |        |        |                    |  |
| Average Ra                  | 80  |                    |        |        |                    |  |
| Beam Angle                  | 120°  |                    |        |        |                    |  |
| Average Life                | > 60000Hrs L70B50@Ta25, 60000HrsL80B10@Ta25 |                    |        |        |                    |  |
| Working Temperature         | -25 C (-13 F)~45 C (+118.4 F)               |                    |        |        |                    |  |
| Material                    | Resistant UV PC Plastic                     |                    |        |        |                    |  |
| Dimmable                    | NO  |                    |        |        |                    |  |
| Environment                 | IP65  |                    |        |        |                    |  |
| Vandal resistant luminaires | Ik10  |                    |        |        |                    |  |
| Certificate                 | CE/CB/ERP                                   |                    |        |        |                    |  |