



UFO Area Light
DUO Selectable
(150W)



UFO Area Light
DUO Selectable
(320W)



UFO Area Light
(150W)



UFO Area Light
(280W)



0-10V Dimming



4 Wattage Selectable



High quality aluminium shell



Introduce:

Our LED area light is super bright&80% energy saving. The shatter-resistant design for both commercial and industrial grade applications such as Parking Lot, Street, Mining, Park, Pooling Lighting, Sport Lighting, Sport Yard, Square, Square Lighting, Tunnel Lighting and industrial buildings, or anywhere perimeter lighting is desirable.

The street light fixtures, LED varieties, are perfect for your area lighting needs. These light pole kits come with everything you need to get your project finished.


Features & Benefits:

- 0-10V seamless dimming capabilities
- 4 Wattage selectable
- Multiple optic lens
- Multiple mounting bracket available
- This light fixture designed with curved line for more harmonious and beautiful look with heavy duty and durable die-cast aluminum material.


Application place:

The product is suitable for Parking Area, Driveway, Business parkway, Walkway and so on.


Available Size:

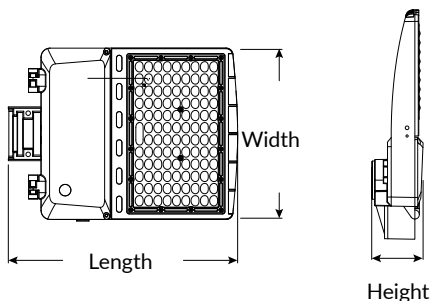


UFO Area Light
DUO Selectable (150W)

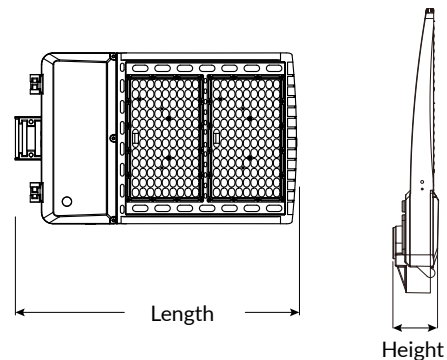

UFO Area Light
DUO Selectable (320W)

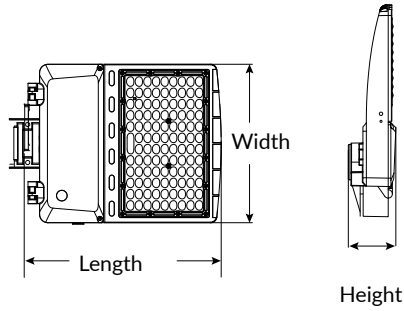

UFO Area Light (150W)

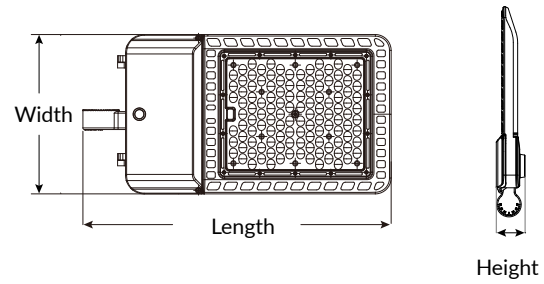

UFO Area Light (280W)

Technical Date:

Picture				
Type	UFO Area Light DUO Selectable (150W)	UFO Area Light DUO Selectable (320W)	UFO Area Light (150W)	UFO Area Light (280W)
Rated Voltage	120-277V	120-277V	120-277V	120-277V
Rated Power	75/100/120/150W	160/200/240/320W	75/100/120/150W	160/200/240/280W
Power Factor	0.7	0.7	0.7	0.7
Declared Luminous Flux	9750/13000/ 15600/19500lm	20800/26000/ 31200/41600lm	9750/13000/ 15600/19500lm	20800/26000/ 31200/36960lm
Color Temperature	2CCT(4000K /5000K)	2CCT(4000K /5000K)	5000K	5000K
Average Ra	70	70	70	70
Beam Angle	Type III	Type III	Type III	Type III
Average Life	50000H	50000H	50000H	50000H
Working Temperature	-20°C (-4°F) ~ 40°C (+104°F)	-20°C (-4°F) ~ 40°C (+104°F)	-20°C (-4°F) ~ 40°C (+104°F)	-20°C (-4°F) ~ 40°C (+104°F)
Material	Aluminum + PC	Aluminum + PC	Aluminum + PC	Aluminum + PC
Dimmable	0-10V	0-10V	0-10V	0-10V
Length	16.00Inch(406.4mm)	24.33Inch(618.00mm)	18.50Inch(470.8mm)	22.80Inch(580.3mm)
Width	11.97Inch(304.0mm)	14.76Inch(375.00mm)	9.84Inch(250.00mm)	11.80Inch(300.0mm)
Height	3.58Inch(91.00mm)	3.82Inch(97.00mm)	2.76Inch(70.00mm)	3.13Inch(79.50mm)
Environment	Wet Location	Wet Location	Wet Location	Wet Location
Certificate	ETL, FCC, DLC5.1P	ETL, FCC, DLC5.1P	ETL, FCC, DLC5.1P	ETL, FCC, DLC5.1P