



PC GU10



AG GU10

## CE CB

### **Introduce:**

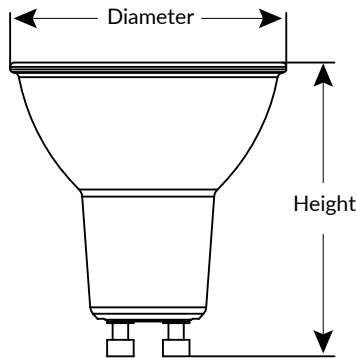
The reflector emits directed light in pendant luminaires, spots and spotlights. The lamp fits in all standard GU10 fittings. It only emits frontal light to highlight pictures, decorations or entire wall surfaces with targeted illumination. Perfect for decorative and general lighting applications and creates a warm ambience similar to traditional lamps.

**Features & Benefits :**

- Easy installation: The standard GU10 base is easy to install and quick to install. It can light up immediately without delay.
- Ultra-high luminous efficiency, Useful Efficiency 120lm/w or Energy Efficiency 140lm/w @3000K
- Up to 94% instant energy saving compared to halogen lamps.
- No Flicker and Buzzing, comfortable for your eyes, provides a comfortable, stress-free atmosphere.
- CRI80, allowing you to enjoy the most realistic objects' color. provides a comfortable, stress-free atmosphere.
- Less heat output and extremely long lifespan 25000hrs.

**Application place :**

Residential home/Living room/ Bedroom/Apartments/Hotel/Restaurant.

**Available Sizes :**

Type	Diameter	Height
PC GU10	1.96Inch(49.8mm)	2.08Inch(52.8mm)
AG GU10	1.96Inch(49.8mm)	2.11Inch(53.5mm)

## Technical Date:

Picture				
Lamp Type	PC GU10	PC GU10	AG GU10	AG GU10
Rated Voltage	220-240V	220-240V	220-240V	220-240V
Rated Power	3W	3.6W	3W	3.6W
Incandescent Equivalent	50W	60W	50W	60W
Power Factor PF	/	/	/	/
Displacement Factor--DF	/	/	/	/
Declared Luminous Flux	Useful 345lm	Useful 430lm	Useful 345lm	Useful 430lm
Color Temperature	3000K/6500K	3000K/6500K	3000K/6500K	3000K/6500K
Average Ra	Ra80	Ra80	Ra80	Ra80
Beam Angle	36°	36°	36°	36°
Average Life	25000H	25000H	25000H	25000H
Working Temperature	-10~40°C	-10~40°C	-10~40°C	-10~40°C
Material	Plastics and Aluminum	Plastics and Aluminum	Plastics and Aluminum	Plastics and Aluminum
Dimmable	/	/	/	/
Weight	/	/	/	/
Base	GU10	GU10	GU10	GU10
Environment	IP20	IP20	IP20	IP20
Certificate	CE/CB/ERP	CE/CB/ERP	CE/CB/ERP	CE/CB/ERP