

**AG PAR20****AG PAR30****AG PAR38****CE CB****Introduce:**

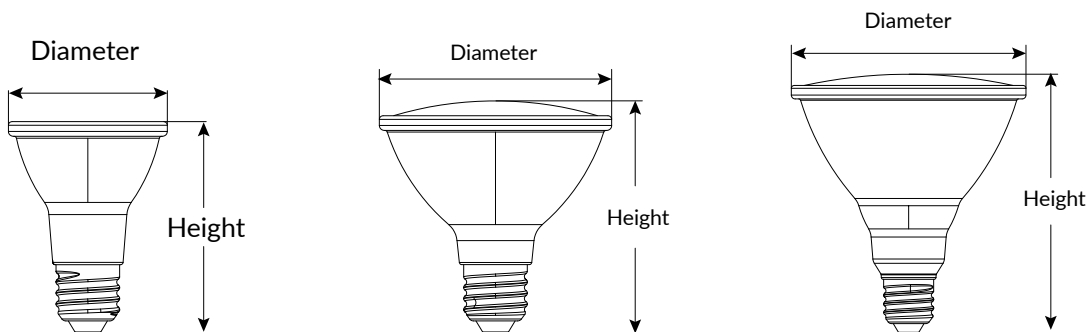
The AG PAR20, PAR30 and PAR38 delivers impressive spot lighting which a perfect retrofit replacement for halogen or incandescent spots. The reflector emits directed light in pendant luminaires, spots and spotlights. It only emits frontal light to highlight pictures, decorations or entire wall surfaces with targeted illumination. Perfect for decorative and general lighting applications and creates a warm ambience similar to traditional lamps.

**Features & Benefits :**

- Enhance efficacy, beam control and excellent optics by Hybrid Reflector Technology.
- Ultra-high luminous efficiency, Useful Efficiency 120lm/w or Energy Efficiency 140lm/w @3000K
- Up to 94% instant energy saving compared to halogen lamps.
- Adjust brightness level from 100% to 10%.
- No Flicker and Buzzing, comfortable for your eyes, provides a comfortable, stress-free atmosphere.
- CRI80, allowing you to enjoy the most realistic objects' color. provides a comfortable, stress-free atmosphere.
- Less heat output and extremely long lifespan 25000hrs.
- PAR38 supports IP65, Use for humid environment.

**Application place :**

Residential home/Living room/ Bedroom/Apartments/Hotel/Restaurant.

**Available Sizes :**

Type	Diameter	Height
AG PAR20	2.56Inch(65mm)	3.40Inch(86.5mm)
AG PAR30	3.74Inch(95mm)	3.74Inch(95mm)
AG PAR38	4.80Inch(122mm)	5.30Inch(134.6mm)

**Technical Data:**

Picture			
Lamp Type	AG PAR20	AG PAR30	AG PAR38
Rated Voltage	220-240V	220-240V	220-240V
Rated Power	4.5W	6.8W	10W
Incandescent Equivalent	75W	95W	140W
Power Factor PF	PF0.7	PF0.7	PF0.7
Displacement Factor--DF	PF0.7	PF0.7	PF0.7
Declared Luminous Flux	Useful 540lm	Useful 820lm	Useful 1200lm
Color Temperature	2700K/6500K	2700K/6500K	2700K/6500K
Average Ra	Ra80	Ra80	Ra80
Beam Angle	36°	36°	36°
Average Life	25000H	25000H	25000H
Working Temperature	-10~40°C	-10~40°C	-10~40°C
Material	Glass and UV PC Plastics	Glass and UV PC Plastics	Glass and UV PC Plastics
Dimmable	Dimmable	Dimmable	Dimmable
Weight	105g	190g	365g
Base	E27	E27	E27
Environment	IP20	IP20	IP20
Certificate	CE/CB/ERP	CE/CB/ERP	CE/CB/ERP