

**R lamps**

120°

**CE CB****Introduce:**

The R lamps delivers impressive spot lighting which a perfect retrofit replacement for halogen or incandescent spots. The reflector emits directed light in pendant

luminaires, spots and spotlights. It only emits frontal light to highlight pictures, decorations or entire wall surfaces with targeted illumination. Perfect for decorative and general lighting applications and creates a warm ambience similar to traditional lamps.


## Features & Benefits:

- Modern construction and attractive design
- Lower maintenance cost compared to traditional lamps
- No Flicker and Buzzing, comfortable for your eyes, provides a comfortable, stress-free atmosphere.
- CRI80, allowing you to enjoy the most realistic objects' color. provides a comfortable, stress-free atmosphere

## Application place:

Residential home/Living room/ Bedroom/Apartments/Hotel/Restaurant

## Available Sizes:

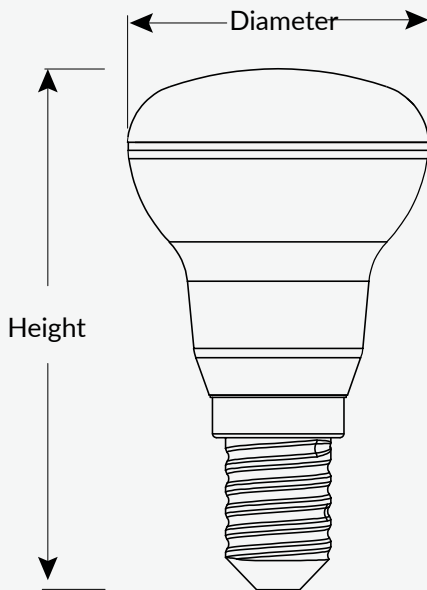

| Type | Diameter        | Height           |
|------|-----------------|------------------|
| R39  | 1.54 Inch(39mm) | 2.68 Inch(68mm)  |
| R50  | 1.97 Inch(50mm) | 3.39 Inch(86mm)  |
| R63  | 2.48 Inch(63mm) | 3.94 Inch(100mm) |
| R80  | 3.15 Inch(80mm) | 4.53 Inch(115mm) |

**Technical Data:**

|                         |                         |              |              |              |
|-------------------------|-------------------------|--------------|--------------|--------------|
| Lamp Type               | R39                     | R50          | R63          | R82          |
| Rated Voltage           | 220-240V                |              |              |              |
| Rated Power             | 3.5W                    | 5.5W         | 7W           | 9W           |
| Power Factor--DF        | PF0.5                   |              |              |              |
| Displacement Factor--DF | DF0.5                   |              |              |              |
| Declared Luminous Flux  | Useful 320lm            | Useful 470lm | Useful 630lm | Useful 860lm |
| Color Temperature       | 3000K/6500K             |              |              |              |
| Average Ra              | Ra80                    |              |              |              |
| Beam Angle              | 120°                    |              |              |              |
| Average Life            | 15000H                  |              |              |              |
| Working Temperature     | -10°(14°F)~40°C(+104°F) |              |              |              |
| Material                | Plastics、Aluminum       |              |              |              |
| Dimmable                | NO                      |              |              |              |
| Weight                  | 20g                     | 29g          | 45g          | 64g          |
| Base                    | E14                     |              | E27          |              |
| Environment             | IP20                    |              |              |              |
| Certificate             | CE/CB/ERP               |              |              |              |