



A Lamp - General CEC&5CCT



GLOWING EFFECT

Instant on to full brightness and luminance uniformity



POLLUTION FREE

RoHS compliant and are 100% mercury free



COLOR SELECT TECHNOLOGY

Adjustable: 2700&3000&3500&4000&5000K



DIMMABLE

TRIAC Dimming



Introduce:

Enjoy all the benefits of advanced LED energy-saving technology with the TOPSTAR LED Light Bulb. The light bulbs feature high color rendering index light with superior light quality and rich vivid color. This LED bulb replaces incandescent bulb, producing a similar light output using less electricity. Preset the color temperature with a toggle on the bulb for your need. Get instant on to full brightness with relatively cool running performance. These TOPSTAR bulbs have an average life of 15,000 hours are RoHS compliant, and are 100% mercury free. Choose a dependable Title 20 Compliant bulb for general purpose residential or commercial applications.


Features & Benefits:

- Instant on to full brightness and TRIAC dimming
- 5 color temperatures optional, let you choose your favorite color temperature
- These LED lights do not contain mercury and won't release any hazardous gases into the air
- Enhance high-CRI LED light makes colors vibrant
- With a lifetime of up to 15,000 hours, you can reduce the hassle of frequently replacing your light bulbs
- Energy efficient LED technology uses considerably less power and last longer compared to equivalent incandescent lights

Application place:

The product is suitable for ceiling fixture, table lamp and so on.

Available Sizes:

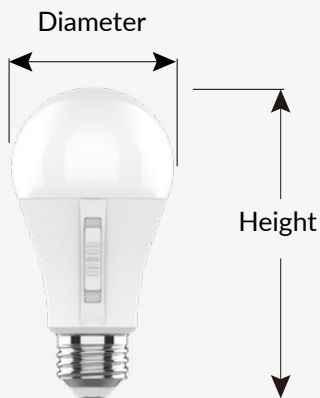

Type	Diameter	Height
TSZ6A19-LD002-CEC	2.28 Inch(58mm)	4.21 Inch(107mm)
TSZ10A19-LD004-CEC	2.28 Inch(58mm)	4.21 Inch(107mm)
TSZ13A19-LD001-CEC	2.36 Inch(60mm)	4.57 Inch(116mm)
TSZ15A19-LD003-CEC	2.36 Inch(60mm)	4.57 Inch(116mm)

Technical Data:

	TSZ6A19 -LD002-CEC	TSZ10A19 -LD004-CEC	TSZ13A19 -LD001-CEC	TSZ15A19 -LD003-CEC
Lamp Type	A19			
Rated Voltage	120V			
Rated Power	6W	10W	13W	15W
Incandescent Equivalent	40W	60W	75W	100W
Power Factor	0.7			
Declared Luminous Flux	480lm	800lm	1100lm	1600lm
Color Temperature	2700&3000&3500&4000&5000K			
Average Ra	Ra90			
Beam Angle	220°			
Average Life	15000H			
Working Temperature	-10°(+14°F)~40°C(+104°F)			
Material	Plastic			
Dimmable	YES			
Weight	0.077Lb(35g)		0.132Lb(60g)	0.168Lb(76g)
Base	E26			
Environment	Damp Location			
Certificate	ETL、FCC、CEC-T20			