

Zed Tri-proof Light A Type













Zed Tri-proof Light A Type

Application:

LED integrated waterproof fixture in 600mm, 1200mm, 1500mm nominal length . High efficiency, up to 135lm/W system efficiency and 45,000 hours lifetime Supplied with movable stainless steel mounting clips for a flexible and easy installation. LED Zed Tri-proof luminaires that provide an ideal solution for applications such as workshops, garages and outdoor covered spaces.


Features & Benefits:


- Easy Installation by mounting brackets.
- High quality robust PC UV Resistant Material.
- IP65、IK08.
- Function optional: Standard/Microwave/EmergencyEmergency power than standard 3Wemergency state can be used for 3 hourslight pass 200lm.
- Microwave and emergency voltage 220~240V.

Application place:

Car parks/ Underground Areas/Warehouses/Workshops.

Available Sizes:



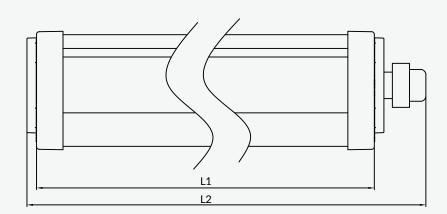

Туре	Height	Width	L1	L2
Zed Tri-proof Light 2Ft	68mm	68mm	600mm	630mm
Zed Tri-proof Light 4Ft	68mm	68mm	1200mm	1230mm
Zed Tri-proof Light 5Ft	68mm	68mm	1500mm	1530mm



Zed Tri-proof Light A Type

Technical Date:

Lamp Type	Tri-proof Light					
Rated Voltage	220-240V	220-240V	220-240V	220-240V	220-240V	220-240V
Rated Power	10W	20W	20W	40W	30W	50W
Power FactorPF	/	/	/	/	/	/
Displacement FactorDF	DF0.7	DF0.7	DF0.7	DF0.9	DF0.9	DF0.9
Declared Luminous Flux	1300lm	2600lm	2700lm	5400lm	4050lm	6750lm
Color Temperature	3000K/4000K/ 6500K	3000K/4000K/ 6500K	3000K/4000K/ 6500K	3000K/4000K/ 6500K	3000K/4000K/ 6500K	3000K/4000K/ 6500K
Average Ra	Ra80	Ra80	Ra80	Ra80	Ra80	Ra80
Beam Angle	120°	120°	120°	120°	120°	120°
Average Life	45000H	45000H	45000H	45000H	45000H	45000H
Working Temperature	-10~40°C	-10~40°C	-10~40℃	-10~40℃	-10~40°C	-10~40˚C
Material	Resistant UV PC plastic					
Dimmable	/	/	/	/	/	/
Weight	600g	600g	1000g	1000g	1300g	1300g
Base	/	/	/	/	/	/
Environment	IP65	IP65	IP65	IP65	IP65	IP65
Certificate	CE/CB/ERP	CE/CB/ERP	CE/CB/ERP	CE/CB/ERP	CE/CB/ERP	CE/CB/ERP